


### Overview

### HPE Integrity BL860c i6 Server Blade

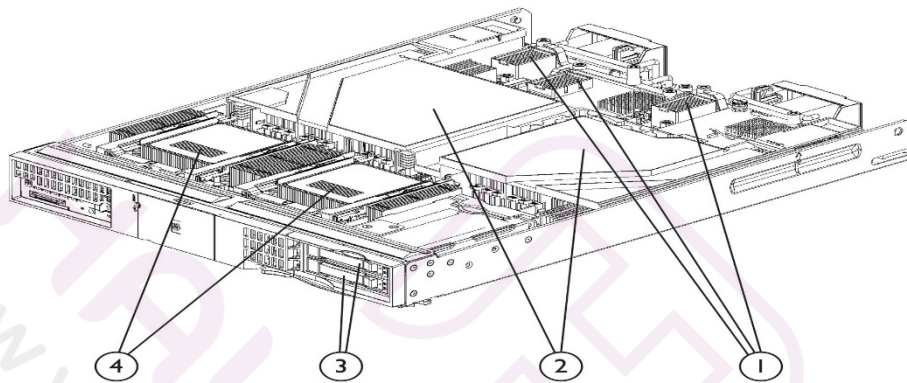

1. 3 x PCIe Mezzanine Slots
2. 24 x DDR3 DIMM Slots
3. 2 x SFF SAS HDDs, hot-swap bays
4. Two Intel® Itanium® processor 9700 series sockets

### What's New

- Intel® Itanium® processor 9700 series 8-core and 4-core processors
- Higher Frequency and Low Voltage PC3L-12800 Registered CAS 11 Memory DIMMs
- Supports the HP-UX 11iv3 2018 OEUR which has significant enhancements in data management (Veritas 6.1 default installed), Virtualization (un-capped vPars warning), high availability (Serviceguard SMS certified with Oracle RAC 12cR2), Java and Open Source (CIFS, BIND, Apache, PHP updates), Security (deactivate online CPU migration in SRP containers) and, manageability (HP-UX in private cloud environments through HPE Helion OpenStack)
- Support for newer networking and storage solutions, such as the HPE 10GbE Pass-Thru Module II, 3PAR 9450, MSA 2050 and MSA 2052, 12Gb/s SAS adapter and Pure Storage FlashArray//M™
- Supports the latest HPE Storage arrays – XP7 and 3PAR 8000/2000 All Flash Storage to significantly boost performance and lower TCO
- VSI OpenVMS V8.4-2L1 supports BL860c i6 servers. It includes a new release of OpenSSL and Secure Web Server (SWS) for OpenVMS based on Apache HTTP Server Version 2.4-12

## Overview

### At A Glance

This document covers the HPE Integrity BL860c i6 server blade only. For more information on HPE BladeSystem c-Class Enclosures and HPE BladeSystem c-Class Interconnect and Mezzanine Components, please see the following:

- HPE BladeSystem c3000 Enclosure QuickSpecs:  
<https://h20195.www2.hpe.com/v2/GetDocument.aspx?docname=c04128340>
- HPE BladeSystem c7000 Enclosure QuickSpecs:  
<https://h20195.www2.hpe.com/v2/GetDocument.aspx?docname=c04128340>
- HPE BladeSystem c-Class Interconnect and Mezzanine Components:
- HPE Virtual Connect  
<https://www.hpe.com/us/en/integrated-systems/virtual-connect.html>
- HPE Server Interconnects  
<https://www.hpe.com/us/en/product-catalog/servers/server-interconnects.hits-12.html>
- HPE Server Adapters  
<https://www.hpe.com/us/en/product-catalog/servers/server-adapters.hits-12.html>

The HPE Integrity BL860c i6 delivers the performance, reliability, and availability on the HPE 64-bit operating system HP-UX 11i v3 for the ultimate in scalability and flexibility in deployment. To further enrich your cost-efficient, consolidated Integrity blade infrastructure, Virtual Server OE (VSE-OE) can help with solution components such as HP-UX Virtual Partitions (vPars) v6.4, HPE Integrity Virtual Machines (Integrity VM), HPE Capacity Advisor, HPE Global Workload Manager, and automation through Hewlett Packard Enterprise infrastructure Orchestration. Additionally, High Availability OE (HA-OE) provides high availability via the HPE Serviceguard clustering technology and Data Center OE (DC-OE) brings the best of the virtualization capabilities along with high availability together in one integrated OE

HPE Integrity BL860c i6 server blade includes:

- **Processor:**
    - Up to two Intel® Itanium® 9700 Series processors
  - **Memory:**
    - Up to 384 GB of memory. Supporting (24) DDR3 registered memory modules (R-DIMMs)
  - **Storage Controller:**
    - Embedded HPE Smart Array p410i SAS Controller
    - RAID 1, RAID 0, and HBA mode configuration options
    - Embedded SAS read only 512MB cache
  - **Internal Drive Support:**
    - Supports up to (2) two small form factor (SFF) SAS hot plug hard drives
  - **Network Controller:**
    - Four (4) integrated HPE NC553i 10Gb FlexFabric adapter ports supporting 10Gb/1Gb autosensing Ethernet, FCoE, Flex-10, and TCP/IP offload engine
- Notes:**
- FlexFabric capability requires OS drivers and the use of an HPE Virtual Connect FlexFabric module. Learn more at: <http://www.hpe.com/info/virtualconnect>
  - BL8x0c i6 server blades require Virtual Connect 3.70 or later when used in Virtual Connect configurations
  - Plus one (1) additional 10/100 NIC dedicated to Integrity iLO 3 Management



## Overview

- **Mezzanine Support:**
  - Three (3) additional I/O expansion slots via mezzanine cards.
  - Supports up to (3) mezzanine cards
    - HPE NC553m Dual Port 10Gb FlexFabric Adapter
    - HPE Emulex LPe1205 8Gb FC BL-c HBA (2-Port 8Gb Emulex FC HBA)
    - HPE QMH 2562 8Gb FC BL-c HBA (2-Port 8Gb QLogic FC HBA)
    - HPE Smart Array P711m/1G FBWC 6G SAS Controller
- **USB Support:**
  - One (1) internal USB port on the BL860c i6
  - Two (2) External USB ports on the BL860c i6 via SUV cable
- **Management:**
  - HPE Integrity Server Blades Management Software
    - Integrity Integrated Lights-Out 3 (iLO 3) management processor
    - HPE Insight Control
    - HPE System Management Homepage
    - HP-UX 11i Management Software for Integrity Blades, <http://www.hpe.com/servers/integrityblades>
      - HPE Ignite-UX
      - HPE Software Assistant (SWA)
      - HPE Dynamic Root Disk (DRD)
  - HPE BladeSystem Infrastructure Management Software:
    - HPE BladeSystem c-Class Onboard Administrator
    - HPE BladeSystem c-Class Virtual Connect
  - Enterprise Management Software
    - Data Protector Software
    - GlancePlus Pak
    - Performance Manager and Agent
- **Virtualization with HPE Matrix OE <http://www.hpe.com/info/matrixoe>**
  - Advanced Infrastructure Management
    - HPE Capacity Advisor (which includes HPE Virtualization Manager))
    - HPE Matrix OE infrastructure orchestration
    - HPE Systems Insight Manager
  - Virtualization Continuum
    - HP-UX Virtual Partitions (vPars) v6.4
    - HPE Integrity Virtual Machines (with HP-UX Guest OS's)
    - HPE Process Resource Manager/pSets
    - HP-UX Containers
  - HPE Matrix OE - Matrix OE Reference Architectures
- **Continuous Availability**
  - HPE Serviceguard for HP-UX 11i
  - HPE Serviceguard Extensions for SAP
  - HPE Serviceguard Extensions for Oracle
  - HPE Continentalclusters



## Overview

- **Form Factor:**
  - HPE Integrity BL860c i6 server blade is a full-height, BladeSystem c-Class form factor. The BL860c i6 server blade plugs into the BladeSystem enclosure. In the c7000 enclosure, 8 server blades are supported per 10U enclosure. 4 enclosures can be configured to a standard 42U rack; 32 BL860c i6 server blades can be configured in a fully populated rack. In the c3000 enclosure, 4 BL860c i6 server blades are supported per 6U enclosure.
- **Enclosures:**
  - Hewlett Packard Enterprise offers two different c-Class server blade enclosures to meet your individual needs:
    - The HPE BladeSystem c7000 rack enclosure is 10U high and holds up to 8 HPE Integrity BL860c i6 servers plugged vertically. Four (4) enclosures can be configured to a standard 42U rack
    - The HPE BladeSystem c3000 rack enclosure is 6U high and holds up to 4 HPE Integrity BL860c i6 servers plugged horizontally. Up to 7 enclosures can be configured to a standard 42U rack
    - The HPE BladeSystem c3000 Enclosure targets three separate market segments:
      - Remote sites needing between 2 and 8 server blades
      - Mid-sized companies with between 3 and 100 servers in their company
      - Enterprise accounts with special datacenter requirement, such as DC power, or very limited rack power and cooling capacity.
  - Server blades, storage blades, and interconnect modules are all designed to fit into the c7000 and c3000 enclosures.
  - For additional enclosure information, please see:
 

<https://www.hpe.com/in/en/product-catalog/servers/bladepystem-enclosures.hits-12.html>
- **Warranty:**
- Protected by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners. Three-year parts, 3 Year Labor and 3 Year on-site limited global warranty. Certain restrictions and exclusions apply. Hard drives have either a one year or three year warranty; refer to specific hard drive QuickSpecs for details

## Models

### HPE Integrity BL860c i6 Base Model

<b>HPE Integrity BL860c i6 (2P)</b> AM377A	<b>Processor(s)</b> Supports up to two (2) processors	Two (2) processor sockets; processor modules are configured to order
	<b>Cache Memory</b>	Included with processors
	<b>Memory</b>	Twenty four (24) DIMM sockets; memory DIMMs are configured to order.
	<b>Network Adapter</b>	Four (4) integrated HPE NC553i 10Gb FlexFabric adapter ports supporting 10Gb/1Gb autosensing Ethernet, FCoE, Flex-10, and TCP/IP offload engine <b>Notes:</b> FlexFabric capability requires OS drivers and the use of an HPE Virtual Connect FlexFabric module. Learn more at: <a href="http://www.hpe.com/info/virtualconnect">http://www.hpe.com/info/virtualconnect</a> <b>Notes:</b> BL8x0c i6 server blades require Virtual Connect 3.00 or later when used in Virtual Connect configurations
	<b>Storage Controller</b>	One (1) additional 10/100 NIC dedicated to Integrity iLO 3 Management Integrated HPE Smart Array p410i SAS Controller Embedded SSAS read only 512MB cache
	<b>Hard Drives</b>	Two SFF SAS drive bays; hard disk drives are configured to order



---

**Overview**

<b>IO expansion</b>	Three PCIe mezzanine card slots (PCIe Gen2 x8 interface); mezzanine cards are configured to order.
<b>Optical Drive</b>	None internal to blade server
<b>Integrity iLO 3</b>	Integrity iLO 3 and Integrity iLO 3 Advance Pack license included.
<b>Form Factor</b>	Up to 8 supported in HPE BladeSystem c7000 Enclosure Up to 4 supported in HPE BladeSystem c3000 Enclosure

---

HAUMOUN  
www.haumoun.com



## Standard Features

### Processor

**Notes:** One of the following depending on Model

#### Octo-Core Processors

Intel® Itanium® 9760 2.66GHz/8-core/32MB/170W Processor  
Intel® Itanium® 9740 2.13GHz/8-core/24MB/170W Processor

#### Quad-Core Processor

Intel® Itanium® 9750 2.53GHz/4-core/32MB/170W Processor  
Intel® Itanium® 9720 1.73GHz/4-core/20MB/130W Processor

### Upgradeability

Upgradeable to two (2) processors

**Notes:** The HPE Integrity BL860c i6 supports 1 or 2 processor configurations. Processors must be identical.

### Cache Memory

**Notes:** One of the following depending on Model

L3 cache; up to 32MB, see processor specifics  
Total 54 MB on-die cache

### All Processors support

Single bit cache error correction  
50 bit physical addressing  
64 bit virtual addressing  
Integrated memory controllers and Scalable Memory Interconnect (SMI)  
Intel Instruction Replay Technology  
Enhanced instructions-level parallelism  
Enhanced Intel Hyper Threading, with Dual-Domain Multi-Threading support  
Intel Cache Safe Technology  
Residual error protection for floating point operations  
Thermal logic technologies  
Dynamic CKE, for additional power savings with memory DIMMs

### Chipset

Intel Boxboro

### Memory

Type	DDR3 registered memory modules (R-DIMMs)
Minimum	16 GB (2 x 8 GB DIMMs)
Maximum	384 GB (24 x 16 GB)

**Notes:** Memory kits are DIMM pairs.

### Network Adapter

Four (4) integrated HPE NC553i 10Gb FlexFabric adapter ports supporting 10Gb/1Gb autosensing Ethernet, FCoE, Flex-10, and TCP/IP offload engine

**Notes:** FlexFabric capability requires OS drivers and the use of an HPE Virtual Connect FlexFabric module. Learn more at: <https://www.hpe.com/info/virtualconnect>

**Notes:** BL8x0c i6 server blades require Virtual Connect 3.70 or later

One (1) additional 10/100 NIC dedicated to Integrity iLO 3 Management

Up to six additional 10 Gigabit Ethernet ports via the NC532m dual-port mezzanine adapters.



## Standard Features

<b>Expansion Slots</b>	Three Mezzanine slots, two (2) Type II and one (1) Type I, PCIe x8 Gen2		
<b>Integrated Manageability</b>	Integrity Integrated Lights-Out 3 (iLO 3) Factory installed Integrity iLO 3 Advanced Pack license HPE BladeSystem c-Class Onboard Administrator HPE BladeSystem c-Class Virtual Connect		
<b>Storage Controller</b>	HPE Smart Array p410i 3Gb SAS Controller	2 SAS Channels (one to each HDD) Supports RAID 1, RAID 0, and HBA mode options Embedded SAS read only 512MB Cache	
<b>Maximum Internal Storage</b>	Hot Plug SAS	2.4TB SAS	2 x 1.2TB SAS
<b>Graphics</b>	Integrated ATI RN-50 1280 x 1024 x 16M color (128 MB DDR memory) Resolution Color Depths 1280 x 1024, 16.7M, 64k, 256, 16 1024 x 768, 16.7M, 64k, 256, 16 800 x 600, 16.7M, 64k, 256, 16 640 x 480, 16.7M, 64k, 256, 16		
<b>FlexFabric Support</b>	Four (4) ports via Two HPE NC553i 10Gb 2-port FlexFabric Converged Network Adapters integrated on system motherboard Dual (2) ports via HPE BLc NC553m Dual Port FlexFabric 10Gb Converged Network Adapter  <b>Notes:</b> BL8x0c i6 server blades require Virtual Connect 3.70 or later <b>Notes:</b> Each port supports 10GbE Ethernet or 8Gb FCoE traffic. <b>Notes:</b> Please see the QuickSpecs for Technical Specifications and additional information and for HP-UX support. <b>HPE NC553m:</b> <a href="https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04123265">https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04123265</a>		
<b>Fibre Channel Support</b>	Optional Fibre Channel HBAs are supported by the HPE Integrity BL860c i6. The mezzanine circuit board connects directly to the server blade system board.  8Gb Fibre Channel Host Bus Adapters: <ul style="list-style-type: none"> <li>• QLogic QMH2562 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem (PN B9F53A)</li> <li>• Emulex LPe1205 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem (PN B9F54A)</li> </ul> 8Gb Fibre Channel HBAs feature: <ul style="list-style-type: none"> <li>• 8/4/2Gb/s auto negotiating speeds</li> <li>• Dual ports for redundant path connections</li> <li>• Optimized for HPE Storage and supported by third party SAN vendors</li> <li>• Support for HP-UX 11i v3</li> </ul>		



## Standard Features

**Compatible SAN** HPE Integrity BL860c i6 server blades are optimized for HPE Storage MSA, 3PAR, and XP7 products.

**Smart Array Controller Support** Optional Smart Array Controller is supported by BL860c i6. The mezzanine circuit board connects directly to the server blade system board, and provides connection to off-blade SAS storage via a SAS interconnect switch module in the HPE BladeSystem enclosure.

HPE Smart Array P711m/1G FBWC 4-ports Ext PCIe x8 6G SAS Controller (PN B9F56A)

- Provides support for HPE Zoned Storage for BladeSystem
- Zoned Storage solution requires compatible HPE Storage 600 Modular Disk System and HPE Storage 3Gb SAS BL Switch
- Supports RAID 6 with Advanced Data Guarding (ADG)
- Provides support for HPE P2000 G3 MSA
- Support for HPE P2000 G3 MSA requires HPE Storage 6Gb SAS BL Switch

**Notes:** For additional details please see:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111558>

**HPE USB Options** External USB DVD drive with 6 ft USB extension cable is supported with c7000 enclosures.

The solution includes the following components:

- External USB DVD drive with 9-inch USB cable
- Power adaptor, power cable and USB Y-connector
- 6-foot USB extension cable

**Notes:** The USB Y-connector goes between the extension cable and the 9-inch USB cable fixed with DVD drive.

**Notes:** The Y-connector should NOT be placed between the server blade and the 6-foot Extension cable.

<b>Integrity Server</b>	HP-UX 11i	<ul style="list-style-type: none"> <li>• <b>Getting Started</b> <ul style="list-style-type: none"> <li>– HPE Systems Insight Manager</li> <li>– HPE Insight Control for HP-UX 11i</li> <li>– HP-UX 11i System Management</li> <li>– HPE BladeSystem Integrated Manager in HPE System Insight Manager</li> <li>– HPE Onboard Administrator</li> <li>– HPE BladeSystem c-Class Onboard Administrator Firmware</li> <li>– HPE BladeSystem c-Class Virtual Connect Firmware</li> <li>– HPE Insight Control for HP-UX 11i v3 (Included in Base OE)</li> </ul> </li> <li>• <b>Deploy</b> <ul style="list-style-type: none"> <li>– HPE Ignite-UX</li> <li>– Software Distributor-UX</li> <li>– Software Package Builder</li> <li>– Dynamic Root Disk (DRD)</li> </ul> </li> <li>• <b>Monitor</b> <ul style="list-style-type: none"> <li>– HPE Systems Insight Manager</li> <li>– HPE System Management Homepage</li> <li>– Glance Plus Pak</li> <li>– Performance Manager and Agent</li> <li>– HPE Serviceguard Manager</li> </ul> </li> </ul>
<b>Blades Management</b>	Management	
<b>Software and HPE</b>	Software for HPE	
<b>Integrity Essentials</b>	Integrity BL860c i6	
<b>Software Plug-ins</b>	Server Blade and HPE BladeSystem	



## Standard Features

- **Control**
  - HPE Integrity Integrated Lights-Out (iLO) 3 (standard with BL860c i6 servers)
  - Integrity iLO 3 Advanced Pack license (included with BL860c i6 servers)
- **Protect**
  - HP-UX Bastille
  - HP-UX Containers
  - Data Protector Software
  - Software Assistant (SWA)
- **Optimize**
  - HPE Capacity Advisory
  - HPE Global Workload Manager
  - Process Resource Manager
  - HPE Insight Power Manager
  - HP-UX 11i v3 power management
- **Provision**
  - HPE Matrix OE infrastructure orchestration
- **Integrate**
  - HPE Business Technology Optimization
  - IT Management Software
  - HPE Matrix OE for HPE Integrity server blades
- **Learn More**
  - For additional information on HPE Integrity server blade management software please visit:  
[http://h20566.www2.hpe.com/hpsc/doc/public/display?sp4ts.o id=5330442&docLocale=en\\_US&docId=emr\\_na-c04014125](http://h20566.www2.hpe.com/hpsc/doc/public/display?sp4ts.o id=5330442&docLocale=en_US&docId=emr_na-c04014125)

<b>Glossary of Integrity Server Blades Management Software Product Description</b>	<b>HPE BladeSystem Integrated Manager in HPE Systems Insight Manager</b>	<p>The HPE BladeSystem Integrated Manager is a component in HPE Systems Insight Manager (SIM) that provides streamlined management for the entire HPE BladeSystem product family. The HPE BladeSystem Integrated Manager enables users to quickly navigate their HPE blade environments including blade servers, enclosure infrastructures, racks, and integrated switches, via automatically generated blade rack picture views and hierarchical trees. Users are able to conveniently configure, deploy, and manage individual or groups of blade systems. Additionally, users are able to quickly set up logical collections of blade systems for convenient management and control.</p>
	<b>HPE Blades Visualization</b>	<p>Used by System Administrators to identify, associate and group blades into collections, using tables, trees, and picture views, and it can also be used to monitor performance and launch Integrity Essentials.  <b>Notes:</b> For more information about Manageability solutions for Integrity Servers go to: <a href="https://www.hpe.com/us/en/integrated-systems/bladeSystem.html">https://www.hpe.com/us/en/integrated-systems/bladeSystem.html</a></p>
	<b>HPE GlancePlus Pack</b>	<p>HPE GlancePlus Pak provides you with a single product for managing a system's availability and performance. It is an integrated product that includes HPE GlancePlus and HPE OpenView Performance Agent. As an integrated product, the GlancePlus Pak includes the real-time diagnostic capabilities of GlancePlus and the historical data collection capabilities of the Performance Agent. The performance agent is used with</p>

## Standard Features

other availability and performance management products, thus providing an integrated real-time and historical performance management solution.

### **HPE Ignite-UX for HP-UX Deployments**

HPE Ignite-UX is a free toolset that enables a network install of HP-UX onto multiple PA-RISC and/or Integrity servers on a network. It can also be used to create custom install configurations, or golden images, recover systems remotely, create custom recovery media including tape, CD and DVD, and manage and monitor multiple client installation sessions.

### **HPE Capacity Advisor**

The capacity planning component of HPE Capacity Advisor offers the industry's first lightweight, integrated tool for ongoing capacity planning by simulating the placement of application workloads to help IT administrators improve server utilization. It captures real-world server utilization data to pre-test different scenarios before making changes to critical applications. HPE Virtualization Manager, which is included with Capacity Advisor and Global Workload Manager, provides a central point of control that allows you to manage all the resources in your virtualized environment and a powerful way to connect IT resources to real business needs.

### **HPE Integrity Integrated Lights-Out (iLO) 3 (factory integrated with BL860c i6)**

HPE Integrity Integrated Lights-Out (iLO) management processors make it simpler, faster, and less costly to remotely manage your Integrity servers. HPE iLO functions without additional software and can be accessed from any location via a web browser. HPE Integrity systems with iLO 3 ships with a built in Advanced Pack License so your Integrity blade is instantly ready to use iLO Virtual Media and iLO power measurement. iLO Advanced features enabled in this release: Virtual Media, LDAP directory services, iLO power measurement, and integration with Insight Power Manager. No additional iLO licensing is needed.

**Notes:** Please see <http://www.hpe.com/info/iLO> for more information

### **HPE Onboard Administrator**

The Onboard Administrator for the HPE BladeSystem enclosure is the brains of the new c-Class infrastructure. Together with the enclosure's HPE Insight Display, the Onboard Administrator has been designed for both local and remote administration of HPE BladeSystem c-Class. This module and its firmware provides:

- Wizards for simple, fast setup and configuration
- Highly available and secure access to the HPE BladeSystem infrastructure
- Security roles for server, network, and storage administrators
- Automated power and cooling of the HPE BladeSystem infrastructure
- Agent-less device health and status
- Thermal Logic power and cooling information and control

**Notes:** Please see <https://www.hpe.com/us/en/product-catalog/servers/bladesystem-enclosures/pip.hpe-onboard-administrator.3188465.html> for more information.

### **HPE Serviceguard Manager**

HPE Serviceguard Manager is a graphical user interface (GUI) that provides configuration, administration, and monitoring capabilities for Serviceguard, Serviceguard Extension for RAC, Metrocluster, and Continentalclusters. Using Serviceguard Manager, operators see color-coded icons that provide a big-picture view of multiple clusters. From this big-picture view, operators can drill down and proactively manage clusters, systems (nodes), and packages that run applications.

### **HPE Systems Insight Manager**

HPE Systems Insight Manager (HPE SIM) provides a unified, secure and extensible environment to centrally manage servers, storage and other infrastructure devices across multiple operating system platforms.



## Standard Features

<b>HPE System Management Homepage</b>	HPE System Management Homepage is a web-based interface that consolidates and simplifies the management of individual ProLiant and Integrity servers running Microsoft Windows or Linux operating systems, or HPE 9000 and HPE Integrity servers running HP-UX 11i. By aggregating data from HPE Insight Management Agents and other management tools, the System Management Homepage provides a secure and intuitive interface to review in-depth hardware configuration and status data, performance metrics, system thresholds and software version control information. The System Management Homepage can also be used to access the HPE Lights-Out Management processor on ProLiant and Integrity servers.
<b>HPE Matrix OE for HPE Integrity servers</b>	HPE Matrix OE is advanced lifecycle management software for HPE Integrity servers which enable you to instantly adjust to dynamic business demands - with the new addition of infrastructure orchestration, not only can you easily plan, configure, and automate your physical and virtual resources in the same way, but now you can also provision and modify a complex infrastructure in minutes.
<b>HP-UX Software Assistant (SWA)</b>	HP-UX Software Assistant (SWA) is a command-line based tool that consolidates and simplifies patch management and security bulletin management on HP-UX systems. The SWA tool is new for HP-UX releases as of January 2007, includes Security Patch Check (SPC), and is the HPE-recommended utility to use to maintain currency with HPE-published security bulletins for HP-UX software.
<b>HP-UX Workload Manager</b>	HP-UX Workload Manager (HP-UX WLM) is a resource management tool that provides automatic CPU resource allocation and application performance management based on your service-level objectives (SLOs) and business priorities. WLM is most effective managing applications that are CPU-bound. It automatically adapts system or partition CPU resources (cores) to the demands, SLOs, and priorities of the running applications. (A core is the actual data processing engine within a processor, where a single processor can have multiple cores, and a core can support multiple execution threads through Hyper-Threading, introduced with HP-UX 11i v3, as discussed below.) It adjusts the CPU allocation of a group of processes known as a workload, basing adjustment on the current needs and performance of the applications in that workload.
<b>HPE Global Workload Manager</b>	The workload management capability for HP-UX Integrity servers is provided by the HPE Global Workload Manager component of HPE Matrix OEInsight Dynamics -- Matrix OEVSE. HPE Global Workload Manager (gWLM) is an intelligent policy engine that automatically allocates resources among multiple workloads to increase server utilization while meeting service levels for high-priority applications. Designed to work across multiple HP-UX 11i, OpenVMS and Linux environments, the workload management features are ideal for large, centralized IT environments that host applications for many departments.
<b>HPE Matrix</b>	HPE Matrix OE capabilities let you provision infrastructure in minutes to automatically activate physical and virtual servers, storage, and networking from pools of shared resources. Whether you need a single virtual machine or infrastructure for a complex three-tier application, Matrix OE finds available resources, streamlines the approval process, and automatically provisions and configures what's needed across infrastructure silos. Delivering infrastructure to the business becomes faster, more efficient, and more reliable.
<b>Performance Manager and Agent</b>	HPE Performance Manager, Agents, and Monitor combine to provide a powerful and flexible distributed management solution. This solution is a single interface for centrally monitoring, analyzing, and forecasting resource utilization for distributed



## Standard Features

multi-vendor environments, enabling you to offer the best possible level of service in a cost-effective manner.

### Process Resource Manager

HPE Process Resource Manager (HPE PRM) is a resource management tool used to control the amount of resources that processes use during peak system load. HPE PRM can manage allocation of the following resources:

- CPU: Ensures a minimum allocation of CPU; can also simultaneously cap CPU resource usage for each group in the configuration. (Starting with HP-UX 11i v3, per-group capping is available.)
- Memory: Ensures a minimum allocation of private real memory; can also cap private memory usage. Allows you to allocate an exact amount of shared memory.
- Disk bandwidth: Ensures a minimum allocation of disk bandwidth

### HP-UX Containers

One method that Matrix OE uses to improve server resource utilization is to consolidate multiple applications within a single operating system image. HP-UX Containers combine kernel level security and prove resource management to stack multiple applications within the same operating system. HP-UX Containers and HP-UX Workload Manager can dedicate specific resources to specific applications within an operating system image, avoiding resource contention issues. Using HP-UX Containers 11i v3 Security Containment, organizations can ensure that application instances cannot access processes or file from other applications or the system. This ensures that multiple application instances run securely in a consolidated environment, providing the benefits of consolidation while preserving the security of a scale out environment. For software licensing purposes, the maximum number of CPUs in HP-UX Containers can be capped. This capability is part of the HP-UX Base Operating Environment (BOE).

### Software Distributor-UX

Software Distributor (SD) is the HP-UX administration tool set used to deliver and maintain HP-UX operating systems and layered software applications. SD is delivered as part of HP-UX; you do not need to download it separately.

---

### OS Support

HP-UX 11i v3 Data Center Operating Environment (DC-OE)  
 HP-UX 11i v3 Virtual Server Operating Environment (VSE-OE)  
 HP-UX 11i v3 High Availability Operating Environment (HA-OE)  
 HP-UX 11i v3 Base Operating Environment (BOE)  
 VSI OpenVMS V8.4-2L1

**Notes:** For complete and up to date information on HP-UX 11i support, please visit the HP-UX11i website at: <http://www.hpe.com/info/hpux>

---

### Supported Software Options

HPE Matrix OE - Matrix OE for HPE Integrity servers (included within both the VSE-OE and DC-OE), which includes the following capabilities for Integrity blades:

HP-UX Virtual Partitions (vPars) v6.4  
 HPE Integrity Virtual Machines (VM)  
 HPE Capacity Advisor  
 HPE Global Workload Manager  
 HPE Integrity Online VM Migration  
 HPE Virtualization Manager  
 HPE Serviceguard for HP-UX 11i  
 HPE Serviceguard Manager  
 HPE Serviceguard Extensions for SAP

## Standard Features

HPE Serviceguard Extensions for Oracle  
 HPE Insight Control power management  
 GlancePlus Pak  
 Performance Manager and Agent  
 HA Monitors  
 MirrorDisk/UX

---

### Intelligent Manageability

HPE Integrity Integrated Lights-Out 3 (iLO 3) Remote Management  
 Virtual serial console (Multiple, mirrored sessions, with previous context and console log buffer)

- Virtual Media
- Virtual Power Button Control
- LDAP Directory Services
- iLO 3 power measurement and integration with Insight Power Manager

Embedded system health and Integrity fault management Diagnostics and troubleshooting:

- virtual front panel
- log access to Integrity System Event Log
- Forward Progress Log Blade power consumption reading

Dedicated LAN Connectivity

Automatic IP Configuration via DHCP/DNS/WINS browser

Command Line and scripted access Industry Standard RC4, 128-bit Secure Sockets Layer (SSL) and Secure Shell (SSH) Security

Directory Services Integration (LDAP)

Support for 19 user accounts with customizable access privileges

**Notes:** iLO 3 Advanced Pack license is included with every BL860c i6 server blade

---

### Availability

Dual-Port Fibre Channel Mezzanine Card for redundant SAN connection

Two hot-plug SAS hard drive bays and integrated RAID (HPE Smart Array p410i) controller on every server blade

Network adapter teaming (network fault tolerance, transmit load balancing, switch-assisted load balancing) supported on integrated LOMs and with add-in Mezzanine cards.

- ECC protected DDR3 memory
- Memory double chip spare to overcome two DRAM chip failures
- Dynamic Processor resilience and deallocation with HP-UX
- Journal file system with HP-UX\*
- Auto reboot
- HPE Serviceguard for HP-UX\*
- HPE Serviceguard Extension for RAC for HP-UX\*
- HPE Serviceguard Extension for SAP for HP-UX\*
- Serviceguard Manager for HP-UX Clusters\*
- HPE Event Monitoring Service
- HA Monitors for HP-UX
- HA Toolkits for HP-UX
- HPE Mirrordisk/UX\* (Included if purchase HP-UX 11i VSE-OE, HA-OE or DC-OE)
- Extended Campus Cluster\*, HPE Metrocluster\*, and HPE Continentalclusters\* for HPE UX
- HPE System Insight Manager (SIM) for proactive fault management
- HPE Serviceguard Storage Management Suites for HP-UX\*

**Notes:** \*Fee based software products.



## Standard Features

### Industry Standard Compliance

- ACPI 2.0 Compliant
- PCIe 2.0 Compliant
- WOL Support
- USB 2.0 Support

### Security

#### Hardware Security

- Administrator's password
- Integrity iLO 3 access control- 19 customizable local user accounts with assignable rights for power, console, configuration, etc.
- OA and Integrity iLO 3 Directory Services Integration (LDAP)
- Integrity iLO 3 access via SSL encryption or SSH
- Integrity iLO 3 access methods via web, SSH, etc. can be disabled
- SSL encryption on web console
- Trusted Platform Module (TPM) option for secure cryptographic key storage, integrates with HP-UX security features

#### Platform security fundamentals

For the past 34 years Hewlett Packard Enterprise has been building one of the most trustworthy and secure UNIX operating systems on the market. Designed for the optimal protection against both external and internal threats. HP-UX 11i offers industry-leading breadth and depth of UNIX security features. Focused on comprehensive security integration aimed at proactively mitigating risk, reducing compliance cost and accelerating time to implementation, HP-UX security solutions significantly lower IT costs. This set of fully integrated and complementary features is designed to provide layered security with in-depth protection of all your enterprise assets by protecting all these aspects of data, systems, data and identity security. HP-UX independently validates its comprehensive security portfolio through Common Criteria security evaluations.

#### Protecting systems

One critical factor in enterprise security is system minimization and hardening. HP-UX 11i offers a set of security features designed to address known and unknown vulnerabilities by running only the services that are needed, thus minimizing a potential point of attack. The following security features have built-in mechanisms not only to minimize and harden the system, but also to detect and react to attack in real time:

- Bastille system hardening
- Host Intrusion Detection System
- Secure Resource Partitions
- IPFilter - firewall technology
- Software Assistant (security bulletin currency)
- Install-time Security
- Boot Authentication
- Standard Mode Security Extensions
- Shadow Passwords
- Strong Random Number Generator

#### Protecting data

HP-UX 11i offers data protection in many forms: protecting data in transit, in use and at rest. By using security features designed to protect data in its three forms, HP-UX 11i customers can minimize possible breaches not only in terms of data loss, but in customer trust as well. Several security features offer data protection capabilities to HP-UX customers:

- Encrypted volume and file system
- Trusted Computing Services
- Security containment
- OpenSSL
- IPSec
- Secure Shell



## Standard Features

- MD5sum

### Protecting Identity:

In modern day global enterprise companies, managing identity is not an easy task, especially as identity management requirements grow to include employees, contractors, partners and suppliers across many countries with various privacy protection laws and regulation. HP-UX 11i dramatically simplifies this critical task by integrating various identity management technologies which offer ease of use and adherence to compliance regulation:

- Identity Management Integration
- Select Access for IdMI
- Role-based Access Control
- AAA Server
- HPE Directory Server for HP-UX
- LDAP-UX Client
- Kerberos Server
- Kerberos Client Services
- PAM Kerberos

Hewlett Packard Enterprise also offers many additional security features available through open source software for HP-UX.

### Common Criteria certification

Many enterprise and government customers require this vendor-independent security certification because it increases confidence in the product's security assurance, functionality, quality and effectiveness. Many governments, including the United States, require certification for government IT procurement.

Certification evaluations are only conducted by the evaluation agency after release of the product. HP-UX 11i v3, has been actively evaluated to the Common Criteria (CC) Security standards for many years. A history of our achievements include:

- February 2003: Certification of HP-UX 11i V1 achieves A CC to Evaluation Assurance Level 4
- May 2006: Certification of HP-UX 11i V2 to the current EAL4 Common Criteria
- May 2008: Certification of HP-UX 11iV3 achieved including hard partitions (nPars)
- December 2009: Certification of HP-UX 11iV3 to CCOPP profile including soft partitions (vPars)

Common Criteria certifications continue to be an integral part of our HP-UX comprehensive security portfolio. HP-UX 11i v3 has successfully completed a new Commercial off the Shelf (COTS) Compartmentalized Operations Protection Profile (CCOPP) evaluation. This new CCOPP evaluation encompasses the extensive range of security solution for HP-UX 11i v3 including soft partitioning or Virtual partitions (vPars) as well as the previously certified hard partitions (nPars).

---

### Factory Express Portfolio for Servers and Storage

HPE Factory Express offers configuration, customization, integration and deployment services for Hewlett Packard Enterprise servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. Hewlett Packard Enterprise products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Integrity Server Blades, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSA1xxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

## Standard Features

For more information on Factory Express services for your specific server model please contact your sales representative or go to: <https://www.hpe.com/us/en/services/factory-express.html>

---

### HPE Simple Configurator

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact the HPE Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hpe.com/SimplifiedConfig/Welcome>

---

HAUMOUN  
www.haumoun.com





## Service and Support

### HPE Services

No matter where you are in your digital transformation journey, you can count on HPE Services to deliver the expertise you need when, where and how you need it. From planning to deployment, ongoing operations and beyond, our experts can help you realize your digital ambitions.

<https://www.hpe.com/services>

---

### Consulting Services

No matter where you are in your journey to hybrid cloud, experts can help you map out your next steps. From determining what workloads should live where, to handling governance and compliance, to managing costs, our experts can help you optimize your operations.

<https://www.hpe.com/services/consulting>

---

### HPE Managed Services

HPE runs your IT operations, providing services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

[HPE Managed Services | HPE](#)

---

### Operational services

Optimize your entire IT environment and drive innovation. Manage day-to-day IT operational tasks while freeing up valuable time and resources. Meet service-level targets and business objectives with features designed to drive better business outcomes.

<https://www.hpe.com/services/operational>

---

### HPE Complete Care Service

HPE Complete Care Service is a modular, edge-to-cloud IT environment service designed to help optimize your entire IT environment and achieve agreed upon IT outcomes and business goals through a personalized experience. All delivered by an assigned team of HPE Services experts. HPE Complete Care Service provides:

- A complete coverage approach -- edge to cloud
  - An assigned HPE team
  - Modular and fully personalized engagement
  - Enhanced Incident Management experience with priority access
  - Digitally enabled and AI driven customer experience
- 

<https://www.hpe.com/services/complecare>

---

### HPE Tech Care Service

HPE Tech Care Service is the operational support service experience for HPE products. The service goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Tech Care Service delivers a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Tech Care Service is available in three response levels. Basic, which provides 9x5 business hour availability and a 2-hour response time. Essential which provides a 15-minute response time 24x7 for most enterprise level customers, and Critical which includes a 6-hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/services/techcare>

---



## Service and Support

### HPE Lifecycle Services

HPE Lifecycle Services provide a variety of options to help maintain your HPE systems and solutions at all stages of the product lifecycle. A few popular examples include:

- Lifecycle Install and Startup Services: Various levels for physical installation and power on, remote access setup, installation and startup, and enhanced installation services with the operating system.
- HPE Firmware Update Analysis Service: Recommendations for firmware revision levels for selected HPE products, taking into account the relevant revision dependencies within your IT environment.
- HPE Firmware Update Implementation Service: Implementation of firmware updates for selected HPE server, storage, and solution products, taking into account the relevant revision dependencies within your IT environment.
- Implementation assistance services: Highly trained technical service specialists to assist you with a variety of activities, ranging from design, implementation, and platform deployment to consolidation, migration, project management, and onsite technical forums.
- HPE Service Credits: Access to prepaid services for flexibility to choose from a variety of specialized service activities, including assessments, performance maintenance reviews, firmware management, professional services, and operational best practices.

**Notes:** To review the list of Lifecycle Services available for your product go to:

<https://www.hpe.com/services/lifecycle>

For a list of the most frequently purchased services using service credits, see the [HPE Service Credits Menu](#)

---

### Other Related Services from HPE Services:

#### HPE Education Services

Training and certification designed for IT and business professionals across all industries. Broad catalogue of course offerings to expand skills and proficiencies in topics ranging from cloud and cybersecurity to AI and DevOps. Create learning paths to expand proficiency in a specific subject. Schedule training in a way that works best for your business with flexible continuous learning options.

<https://www.hpe.com/services/training>

#### Defective Media Retention

An option available with HPE Complete Care Service and HPE Tech Care Service and applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

Consult your HPE Sales Representative or Authorized Channel Partner of choice for any additional questions and services options.

#### Parts and Materials

HPE will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

#### How to Purchase Services

Services are sold by Hewlett Packard Enterprise and Hewlett Packard Enterprise Authorized Service Partners:

- Services for customers purchasing from HPE or an enterprise reseller are quoted using HPE order configuration tools.
- Customers purchasing from a commercial reseller can find services at <https://ssc.hpe.com/portal/site/ssc/>



---

## Service and Support

### AI Powered and Digitally Enabled Support Experience

Achieve faster time to resolution with access to product-specific resources and expertise through a digital and data driven customer experience

Sign into the HPE Support Center experience, featuring streamlined self-serve case creation and management capabilities with inline knowledge recommendations. You will also find personalized task alerts and powerful troubleshooting support through an intelligent virtual agent with seamless transition when needed to a live support agent.

<https://support.hpe.com/hpesc/public/home/signin>

---

### Consume IT On Your Terms

**HPE GreenLake** edge-to-cloud platform brings the cloud experience directly to your apps and data wherever they are—the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake edge-to-cloud platform accelerates digital transformation in a distributed, edge-to-cloud world.

- Get faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

To learn more about HPE Services, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner. Contact information for a representative in your area can be found at "Contact HPE"

<https://www.hpe.com/us/en/contact-hpe.html>

For more information

<http://www.hpe.com/services>

---



## Configuration Information

### Factory Integrated or Field Upgrade Models

**Notes:** This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

**Notes:** Hewlett Packard Enterprise does not allow factory integration of options into standard models listed above. Configure-to-order servers must start with a CTO Chassis.

**Notes:** FIO indicates that this option is a Factory Installable Option.

### Step 1: Base Server Blade Configuration

<b>HPE Models</b>	HPE Integrity BL860c Server Blade	AM377A
	<b>Notes:</b> Adding Option code "#0D1" to the Server Blade PN will integrate the configured blade into the enclosure (which must be on the same order).	
	<b>Configurable Model ships with:</b>	
	Four (4) integrated HPE NC553i 10Gb FlexFabric adapter ports supporting 10Gb/1Gb autosensing Ethernet, FCoE, Flex-10, and TCP/IP offload engine plus (1) additional 10/100 NIC dedicated to Integrity iLO 3 Management	
	Integrated HPE Smart Array p410i SAS Controller for internal HDDs	
	Integrated SAS read only 512MB cache	
	Two small form factor (SFF) SAS hot plug hard drive bays	
	HPE Integrity Integrated Lights-Out 3	

### Step 2: Choose Required Options (one of the following from each list unless otherwise noted):

<b>HPE Processors</b>	<b>Notes:</b> Select minimum one (1) and maximum two (2) processors.	
	<b>Octo-Core Processors</b>	
	Intel Itanium 9740 (2.13GHz/8-core/24MB/170W) Processor Kit for HPE Integrity BL8x0c i6	AM383B
	Intel Itanium 9760 (2.67GHz/8-core/32MB/170W) Processor Kit for HPE Integrity BL8x0c i6	AM382B
	<b>Quad-Core Processor</b>	
	Intel Itanium 9720 (1.73GHz/4-core/20MB/130W) Processor Kit for HPE Integrity BL8x0c i6	AM385B
	Intel Itanium 9750 (2.53GHz/4-core/32MB/170W) Processor Kit for HPE Integrity BL8x0c i6	AM384B
<b>HPE Memory</b>	<b>Notes:</b> Select minimum one (1) (2x8GB DIMMs) memory kit per server, and maximum of six (6) memory kits per server (12 memory kits if 2 processors ordered)	
	HPE BL8x0c 32GB (2x16GB) Dual Rank PC3L-12800 (DDR3-1600) Registered CAS-11 Memory Kit	AM388A
	<b>Notes:</b> Memory kits consist of pairs of DIMMs.	
	<b>Notes:</b> DIMMs must be installed in pairs.	
	<b>Notes:</b> Minimum memory requirement is 16GB.	

### Step 3: Choose Additional Options for Factory Integration

**HPE Hard Drives** **Notes:** Hard drives have either a one year or three year warranty; refer to specific hard drive QuickSpecs for details.

**SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives**



## Configuration Information

HPE Integrity 600GB SAS 12G Enterprise 15K SFF (2.5in) ST 3yr Wty Digitally Signed Firmware HDD B9F32B

HPE Integrity 1.2TB SAS 12G Enterprise 10K SFF (2.5in) ST 3yr Wty Digitally Signed Firmware HDD B9F36B

**Notes:** Though the disks are 12Gb, implementation of the embedded HPE Smart Array p SAS RAID controller limits performance of disks.

### 12G SAS Hot Plug Enterprise Performance Solid State Drives

HPE 400GB SAS 12G Write Intensive SFF (2.5in) ST 3yr Wty Digitally Signed Firmware SSD P04558- B21

**Notes:** Provides four additional Gigabit Ethernet ports per I/O expansion slot.

**Notes:** BL860c i6 supports HPE Virtual Connect Ethernet Interconnect Modules. See: <https://www.hpe.com/us/en/integrated-systems/virtual-connect.html> for complete details.

**Notes:** Provides two additional Gigabit Ethernet ports per I/O expansion slot.

---

## Step 4: Choose Additional Options for Field Upgrades

### Notes:

- For additional options, please refer to the "Core Options" and "Additional Options" section below. For additional options, including server blade enclosures interconnect, mezzanine options and power subsystem options; please see the Core Options and Additional sections below; or the following HPE BladeSystem c-Class Enclosures QuickSpecs:
    - o HPE BladeSystem c3000 Enclosure QuickSpecs:  
[http://h18000.www1.hp.com/products/QuickSpecs/12790\\_div/12790\\_div.html](http://h18000.www1.hp.com/products/QuickSpecs/12790_div/12790_div.html)
    - o HPE BladeSystem c7000 Enclosure QuickSpecs:  
[http://h18000.www1.hp.com/products/QuickSpecs/12810\\_div/12810\\_div.html](http://h18000.www1.hp.com/products/QuickSpecs/12810_div/12810_div.html)
    - o HPE BladeSystem c-Class Interconnect and Mezzanine Components:
    - o HPE Virtual Connect  
<https://www.hpe.com/us/en/integrated-systems/virtual-connect.html>
    - o HPE Server Interconnects  
<https://www.hpe.com/us/en/product-catalog/servers/server-interconnects.hits-12.html>
    - o HPE Server Adapters  
<https://www.hpe.com/us/en/product-catalog/servers/server-adapters.hits-12.html>
- 



## Additional Options

<b>HPE Services operational services</b>	<b>Notes:</b> Hewlett Packard Enterprise offers a range of support services and additional services. For a complete listing of services, see: HPE.com external site: <a href="https://ssc.hpe.com/portal/site/ssc/">https://ssc.hpe.com/portal/site/ssc/</a>	
	<b>HPE Critical Service</b>	
	HPE 1Y Critical SVC	HA112A1
	HPE 3Y Critical SVC	HA112A3
	<b>Installation Services</b>	
	HPE Installation SVC	HA113A1
	<b>Notes:</b> For more information: <a href="https://ssc.hpe.com/portal/site/ssc/">https://ssc.hpe.com/portal/site/ssc/</a>	

---

HAUMOUN  
www.haumoun.com



## Memory

### DIMM installation guidelines:

1. All DIMMs must be DDR3 registered memory modules (R-DIMMs)
2. Both DIMM slots in a memory bank must be populated. A memory bank in this case is identical with a memory pair. A PCU will drive banks A through F.
3. Banks must be populated in sequential Alphabetic order, starting with bank A for CPU0, followed by bank A for CPU1, etc.
4. Both DIMMs in a memory bank must be identical.
5. DIMMs must be installed in decreasing capacity with the largest DIMMs installed in the smallest numbered DIMM slot.

#### HPE Integrity BL860c i6 Server Blade

##### Standard Memory

16 GB - HPE BL8x0c 16GB (2x8GB) Single Rank PC3L-12800R (DDR3-1600) Registered CAS-11 Memory Kit  
Memory Bus Bandwidth: 6.4GT/s

##### Standard Memory Plus Optional Memory

Up to 384GB of DDR3 registered memory is available.

---


<b>BCS Blades Options</b>	HPE BL8x0c 32GB (2x16GB) Dual Rank PC3L-12800 (DDR3-1600) Registered CAS-11 Memory Kit	AM388A
---------------------------	--	--------

---

www.haumoun.com



Storage



- 1. 2 x SFF SAS Hot Plug Hard Drives

**Hard Drives**

**SAS Hot Plug SFF Enterprise (ENT) Drives**

**Notes:** Hard drives have either a one year or three year warranty; refer to specific hard drive QuickSpecs for details.

	Quantity Supported	Position Supported	Controller
1.2TB 12G 10K SFF 600GB 12G 10K SFF 300GB 12G 10K SFF 300GB 12G 15K SFF 600GB 12G 15K SFF 900GB 12G 15K SFF	2	1-2	HPE Smart Array P410i Controller

**6G SAS Hot Plug Enterprise Performance Solid State Drives**

**Notes:** Hard drives have either a one year or three year warranty; refer to specific hard drive QuickSpecs for details.

	Quantity Supported	Position Supported	Controller
400GB/800GB 12G SLC SFF	2	1-2	HPE Smart Array P410i Controller





## Technical Specifications

### Power Specifications

**Notes:** The HPE Power Advisor is a tool provided by Hewlett Packard Enterprise to assist in the estimation of power consumption and proper selection of components including power supplies at a system, rack, and multi-rack level. A variety of additional features are also provided including a condensed bill of materials, a cost of owner ship calculator, and a power report. For additional information please visit: HPE Power Advisor: <https://www.hpe.com/in/en/integrated-systems/rack-power-cooling.html>

<b>System Unit</b>	<b>Dimensions</b>	Height	14.42 in (36.63 cm)
		Depth	19.1 in (48.51 cm)
		Width	2.025 in (5.14 cm)
	<b>Shipping Dimensions</b>	Height	21.50 in (54.61 cm)
		Depth	26.0 in (66.04 cm)
		Width	10.00 in (25.4 cm)
	<b>Weight</b>	Maximum	25.0 lbs (11.3 kg)
		<b>Temperature Range*</b>	
	<b>Temperature Range*</b>	Operating	10° to 35° C (50° to 95° F)
		Non-Operating	-40° to 60° C (-40° to 140° F)
		Storage	-20° to 60° C (-4° to 140° F)
		Maximum Wet Bulb Temperature	30° C (86° F)
	<b>Relative Humidity**</b>	Operating	15% to 80% RH non-condensing
		Shipping	5% to 95% RH non-condensing
		Storage	5% to 95% RH non-condensing

\***Notes:** All temperature ratings shown are for sea level. An altitude derating of 1°C per 304.8 m (1.8°F per 1,000 ft) to 3048 m (10,000 ft) is applicable. No direct sunlight allowed. Upper operating limit is 3,048m (10,000 ft) or 70 Kpa/10.1 psia. Upper non-operating limit is 9,144 m (30,000 ft) or 30.3 KPa/4.4 psia.

\*\***Notes:** Storage maximum humidity of 90% is based on a maximum temperature of 45°C (113°F). Altitude maximum for storage corresponds to a pressure minimum of 70 KPa.

<b>Embedded SAS RAID HPE Smart Array p410i Controller</b>	<b>Disk Drive and Enclosure Interface</b>	3Gb SAS (Serial Attached SCSI)
	<b>SAS Connectors</b>	2 internal (SFF8484) x4 wide part connectors
	<b>Cache Memory Speed</b>	DDR2-800 memory provides up to 4.2 GB/s maximum bandwidth
	<b>Server Interface</b>	X1 5.0Gbps PCIe provides 1GB/s maximum bandwidth.
	<b>SAS Speed</b>	Two x1 3G SAS provide 600MB/s maximum bandwidth.
	<b>Cache Memory</b>	Embedded SAS read only 512MB.
	<b>Logical Drives Supported</b>	Up to 2 logical volumes
	<b>Maximum Logical Drive Capacity</b>	Up to 64 logical
	<b>Host Memory Addressing</b>	64-bit, supporting greater than 4GB server memory space
	<b>RAID Support</b>	RAID 0 (Striping), RAID 1 (mirroring), and 1+0 (Mirrored and Striped) (not supported with BL8x0c i6 blades)
	<b>Upgradeable Firmware</b>	Upgradeable Firmware with Recovery ROM features Online Drive Flash requires 256MB, 512MB, or 1GB cache module

## Technical Specifications

<b>Embedded NC553i 10 Gb 2-port FlexFabric NICs with Flex-10 support</b>	<b>Network Interface</b> <b>Compatibility</b> <b>Data Transfer Method</b> <b>Network Transfer Rate</b> (Theoretical Maximum Values)	1000Base-Sx IEEE 802.3p QoS 802.3x flow control, and 802.3ap 10GBase-KR PCI Express, four lanes (x4) 1Dual 10Gb parts offer up to 40Gb/s bidirectional theoretical throughput
<b>Environment-friendly Products and Approach</b>	<b>End-of-life Management and Recycling</b>	<p>Hewlett Packard Enterprise offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <a href="http://www.hpe.com/info/recycle">http://www.hpe.com/info/recycle</a>. To recycle your product, please go to: <a href="http://www.hpe.com/info/recycle">http://www.hpe.com/info/recycle</a> or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: <a href="http://www.hpe.com/info/recycle">http://www.hpe.com/info/recycle</a>. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.</p>
<b>Regulatory Compliance</b>	<b>Regulatory Model Number</b> <b>Electromagnetic Interference</b>  <b>Safety</b> <b>More detailed regulatory documents and certifications</b>	RSVLA-BC11 Complies with FCC Rules and Regulations, Part 15, as a Class A digital device. Manufacturer's Declaration to EN55022 Class A, VCCI Registered, Class A, KC (Korea Certification), BMSI Taiwan, CSA Certified, compliant with IEC 60950, UL 60950, EN 60950 and EN41003 UL Listed, CSA Certified, TUV GS Mark compliant with EN 60950 and EN 41003 <a href="https://www.hpe.com/us/en/about/environment/msds-specs-more.html">https://www.hpe.com/us/en/about/environment/msds-specs-more.html</a>




## Summary of Changes

Date	Version History	Action	Description of Change
04-Dec-2023	Version 12	Changed	Service and Support section was updated
15-Nov-2021	Version 11	Changed	Service and Support Pointnext Tech Care and Complete Care information were updated
02-Dec-2019	Version 10	Changed	Configuration Informaiton section was updated.
03-Dec-2018	Version 9	Changed	Overview, Standard Features, and Ordering and Configuration sections were updated.
		Added	SKUs added in Ordering and Configuration section: P04558-B21, P04562-B21
01-Oct-2018	Version 8	Changed	Configuration Information – Factory Integrated Models, Additional Options and Memory were updated.
04-Sep-2018	Version 7	Changed	Overview, Standard Features, Configuration Information - Factory Integrated or Field Upgrade Models, and Additional Options sections were updated.
		Removed	SKUs were deleted: P9R63BC, P9R63BCE, P9R63BCE#888, P9R65BC, P9R65BCE.
02-Jul-2018	Version 6	Changed	Configuration Information – Factory Integrated section and Additional Options sections were updated.
		Removed	Obsolete SKUs were deleted: 467799-B21, 451871-B21, 456972-B21, 513778-B21.
08-Jan-2017	Version 5	Changed	Configuration Information - Factory Integrated or Field Upgrade Models and Storage sections were updated.
		Added	SKUs added in Configuration Information - Factory Integrated or Field Upgrade Models section: B9F30B, B9F32B, Q2C47A, B9F33B, B9F34B, B9F36B.
		Removed	SKUs deleted in Configuration Information - Factory Integrated or Field Upgrade Models section: 872842-B21, 872844-B21, 872846-B21, 873008-B21, 873010-B21.
23-Oct-2017	Version 4	Changed	Care Pack naming and Service and Support- Parts and Materials updated.
25-Sep-2017	Version 3	Changed	Configuration Information - Factory Integrated or Field Upgrade Models and Memory sections were updated.
		Added	SKUs added in Configuration Information - Factory Integrated or Field Upgrade Models section: 873349-B21, 873460-H21.
		Removed	SKUs removed in Configuration Information - Factory Integrated or Field Upgrade Models section: 802576-B21, 802580-B21, 802584-B21.
11-Jul-2017	Version 2	Changed	Standard Features, Configuration Information - Factory Integrated or Field Upgrade Models, and Storage sections were updated.
		Added	SKU added in Configuration Information - Factory Integrated or Field Upgrade Models section: AM387B
		Removed	SKUs added in Configuration Information - Factory Integrated or Field Upgrade Models section: 785079-B21, 785075-B21, 785073-B21, 785099-B21, 785071-B21, 785101-B21, 785103-B21, AM387A.
05-Jun-2017	Version 1	Created	New QuickSpecs

## Copyright

**Make the right purchase decision.  
Contact our presales specialists.**



© Copyright 2023 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries. For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

a00005203enw - 15890 - Worldwide - V12 - 04-December-2023

www.haumoun.com